

REOTEMP INSTRUMENTS Product drawing

THERMOWELL WITH:


- Threaded Process Connection
- Tapered Shank (see note 3)

Reotemp Part#: **ST16Y-U14.5T**

Material: **Inconel 600**

Dimensions (inches):

Bore Dia. B:	.260" bore, for 1/4" dia. Element"
Element Length A:	16"
Overall Length L:	16.25"
Insertion Length U:	14.5"
Process P:	3/4" NPT (std)
Shank dia. Q1:	0.875"
Shank dia. Q2:	.625"

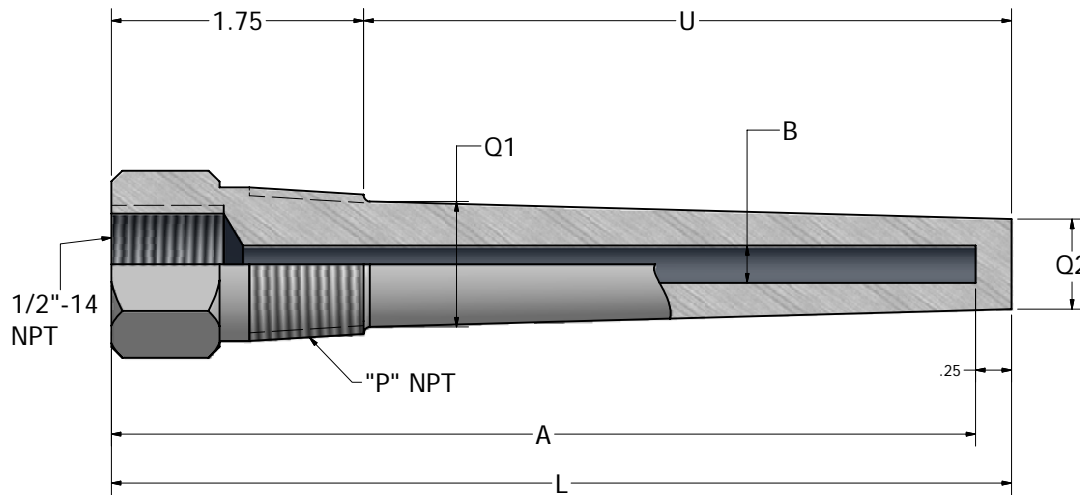

Options included (not depicted in Dwg.)

Option 1:	
Option 2:	
Option 3:	
Option 4:	
Option 5:	
Option 6:	
Option 7:	
Option 8:	

Drawing No.: **TWC-TT-ST16Y-U14.5T**


Data production date: 08/16/2022

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF REOTEMP INSTRUMENT CORP., AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS DEPICTED HEREIN WITHOUT WRITTEN PERMISSION FROM REOTEMP INSTRUMENT CORP.

NOTES (UNLESS OTHERWISE SPECIFIED)

- 1) DIMENSIONS ARE IN INCHES
- 2) DIMENSIONS ARE SUBJECT TO CHANGE. FINAL DIMENSIONAL VERIFICATION CAN BE REQUESTED AT TIME OF ORDER.
- 3) LAST 16" OF SHANK IS TAPERED WHEN U > 16".

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
X1	INITIAL RELEASE	5/14/10	MO

PART NAME THERMOWELL, THREADED, TAPERED SHANK		REOTEMP Instrument Corporation		DATE 5/14/10
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		10656 Roselle Street San Diego, CA 92121 USA Phone: (858) 784-0710 Fax: (858) 784-07-20		DRAWN BY JHRichter
FRACTIONS ±1/32	DECIMALS .X ± .03 .XX ± .01 .XXX ± .005			APPROVED MO
PART NO SEE CHART	SIZE C	CAGE CODE 24793	BASE DWG NO TWC-TT	REV X1
FIRST USED ON	SCALE: NTS	FILE NAME: CF	SHEET 1 OF 1	