


Reotemp RTD Assembly

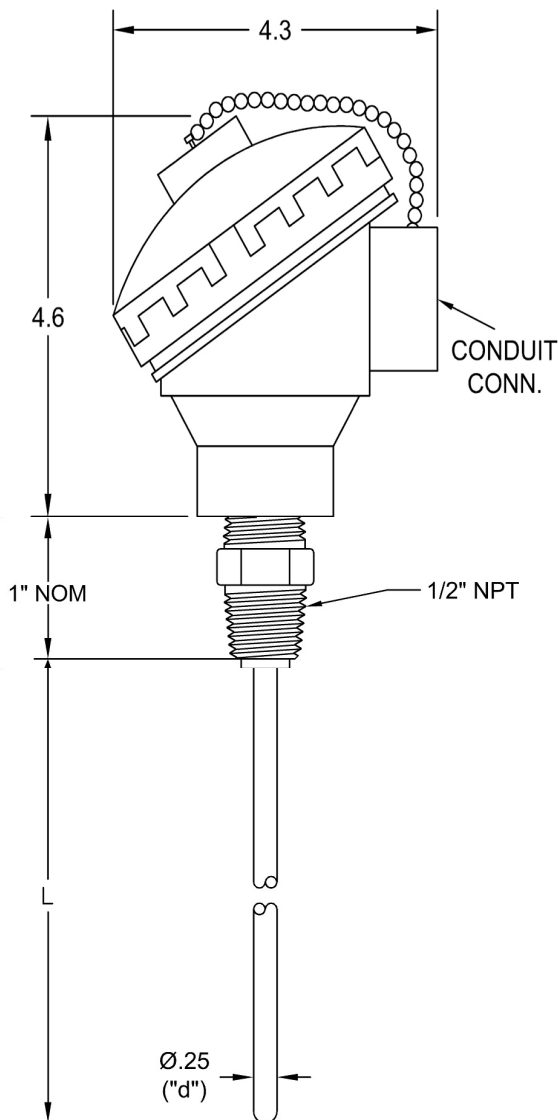

Part#: P-N-1T-PX1259X

Description:

RTD Assembly, with Din Black Poly Head, No terminal block or transmitter, Spring-loaded 316SS Bushing, 1/2" NPT, 3-wire Single (Standard), Std temp RTD (Pt/385/ Class B (Standard), 100 ohm), 1/4" dia. X 9 in. long, 316SS stem

Head Data:

Description: Din Black Poly
Material: Polypropylene
Color: Black
Conduit Conn. "P": 3/4"NPT Conduit
NEMA/IP rating: Nema 4/IP65

In- Head:

No terminal block or transmitter

Power In:
Signal Out:
Protocol:
Approvals:
Note:

Process Connection:

Spring-loaded 316SS Bushing, 1/2" NPT
 (Thermowell Required. Stem retracts nominal 1/2" max in well.)

Stem Data:

Stem Length "L": 9 in.
Stem "D" (in.): 1/4"
Stem Jacket Material: 316SS
Min. Recommended Immersion (without thermowell): 2.5"

Sensor Data:

Sensor: RTD
Resistance @ 0°C: 100 ohm
Tolerance Class (IEC 60751): B
Sensors: Single
Temperature Range: Std. Range: -328F to 400F (-200C to 204C)

Revision Status:	Data generated on: 10/11/2022
Latest Revision:	x3
Revision Date:	12/1/2015
Description:	Stm length

*Revision date applies to all possible data: Individual drawings may not be affected. To obtain current revision, re-generate drawing at www.reotemp.com

Dimensions are in inches.

Consult factory for critical dimensions.

© 2021
 Reotemp Instrument Corp.

Reotemp Instrument Corporation

REOTEMP

10656 Roselle Street
 San Diego, CA 92121 USA
 Phone: (858) 784-0710
 Fax: (858) 784-0720

DRAWN BY:
 JR

SIZE:
 B
 CAGE CODE:
 24793

SCALE:
 NTS

SHEET:
 1 OF 1

Made in U.S.A.

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF REOTEMP INSTRUMENT CORP., AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS DEPICTED HEREIN WITHOUT WRITTEN PERMISSION FROM REOTEMP INSTRUMENT CORP.