


REV.	E.N.	DATE	APPROVED
A	19469	05/17/95	DALE
B	29294	02/09/09	DALE
C	31245	03/22/11	DALE

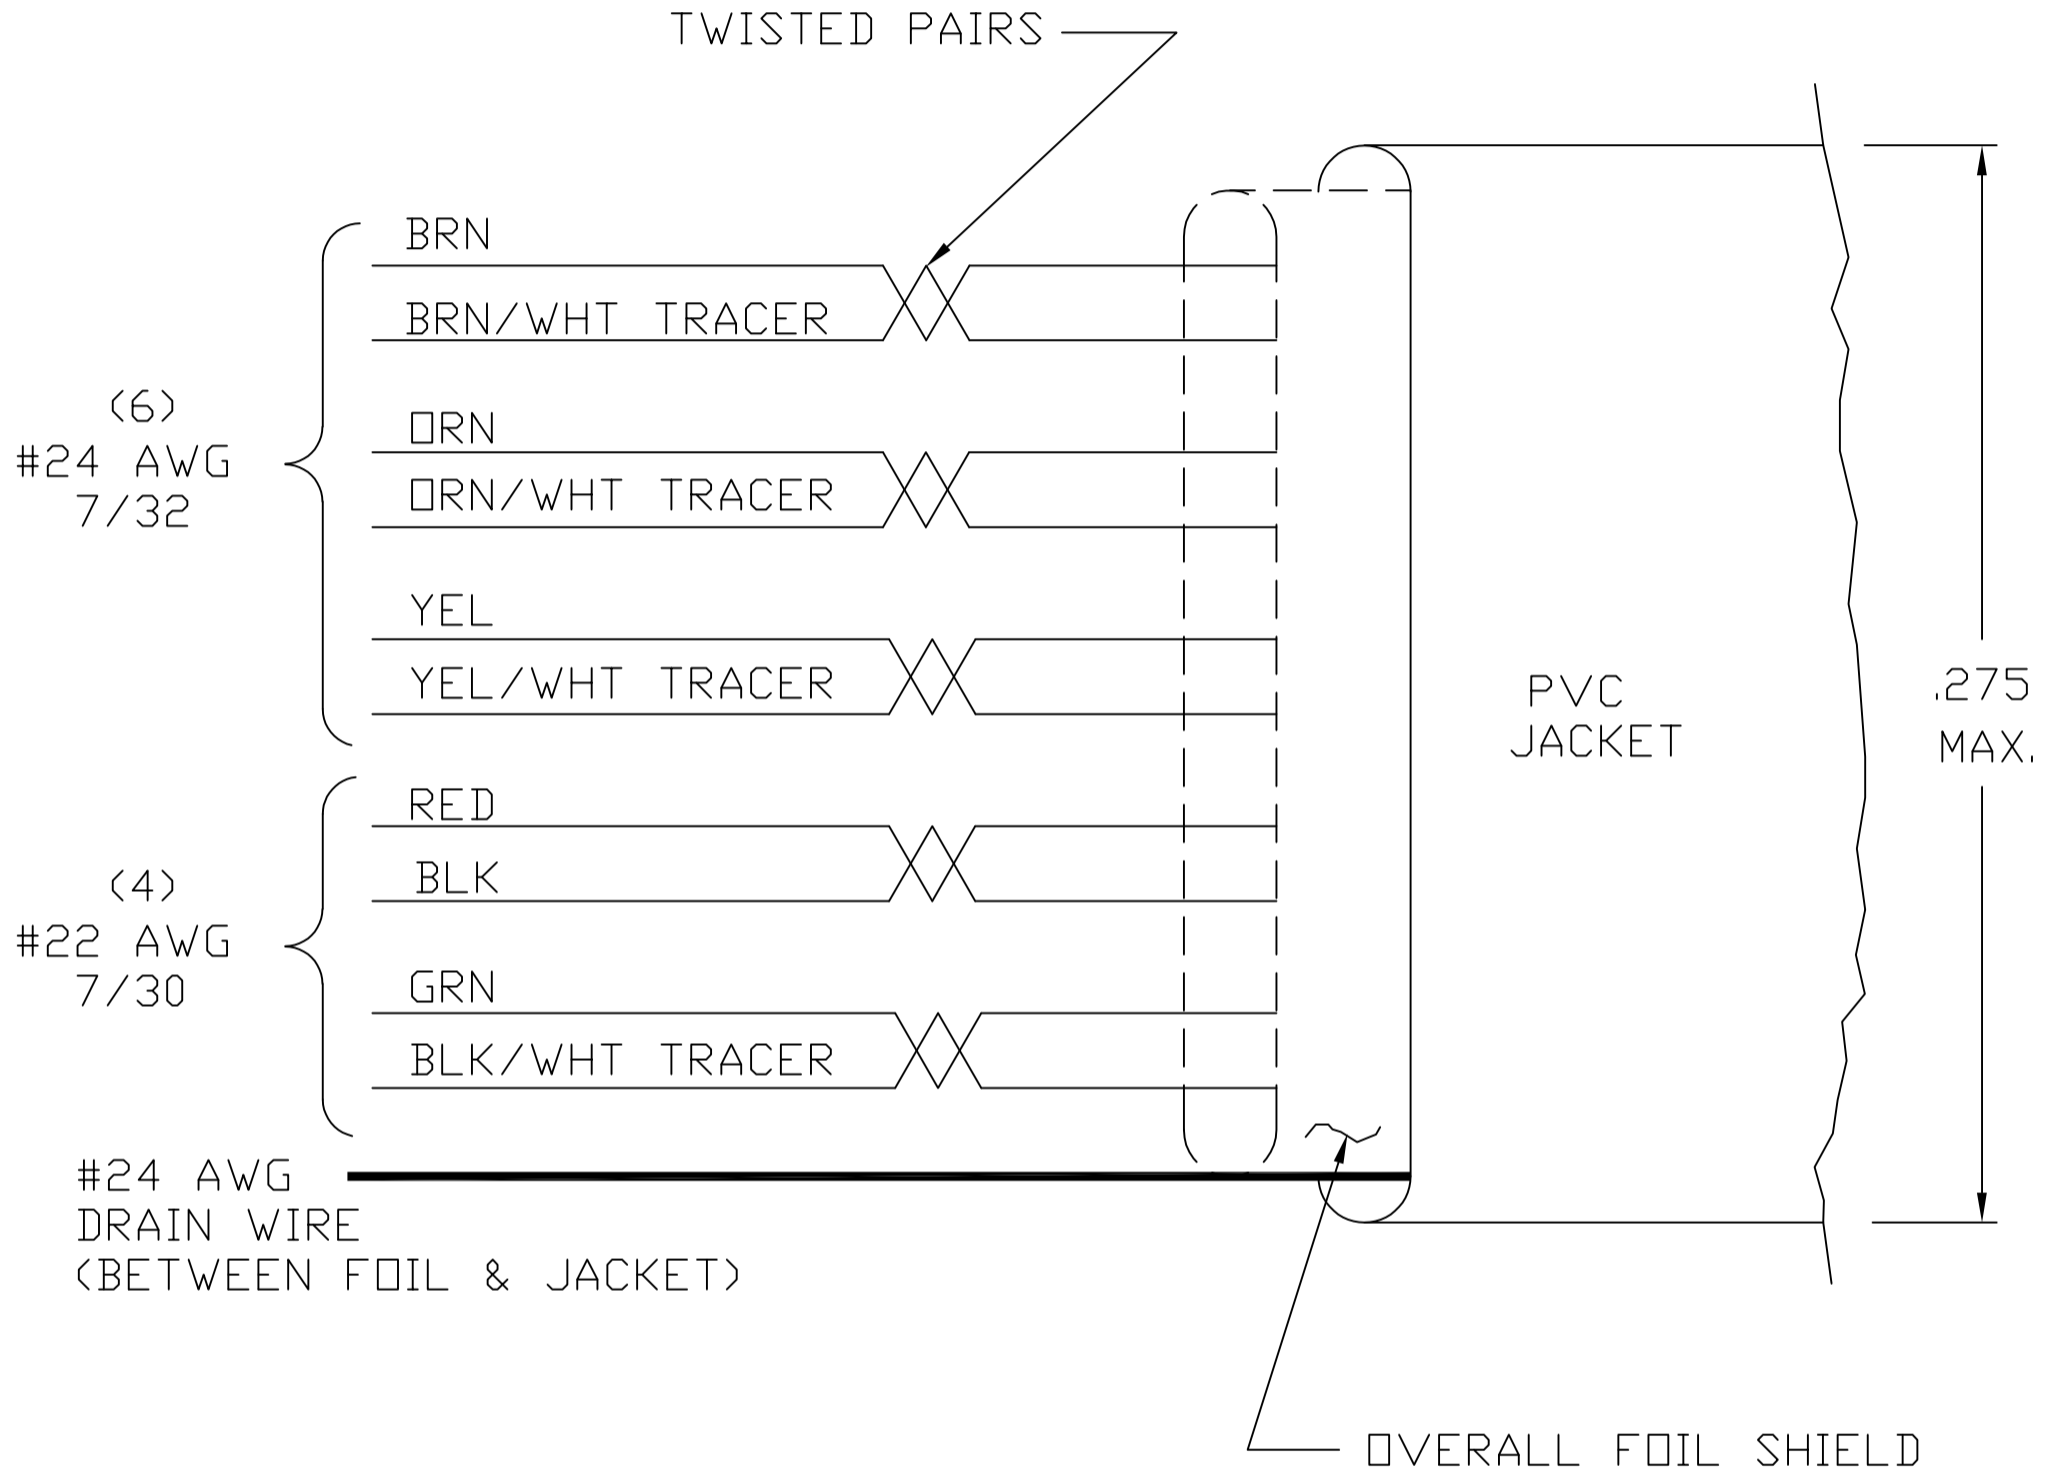

- NOTES:**
- 1. CABLE SPECIFICATIONS:
 CONDUCTORS: TINNED COPPER
 WIRE INSULATION: 0.01 WALL PVC
 VOLTAGE RATING: 300V
 - TEMPERATURE RANGE: -20°C TO +105°C
 CONDUCTOR CAPACITANCE: 24AWG:300+/-15nF/km; 22AWG:370+/-15nF/km

TOLERANCES UNLESS INDICATED: .XXX ± / .XX ± / ANGLES ± /			MAT'L NOTED FINISH /		TITLE CABLE, 10 COND, PVC			
© 1992 D.T.C.			"A" size		HDMS ENTRY	DATE	SCALE 1=1	FILE NAME: 107312
DANAHER CONTROLS			DRAWN BMF		DATE 3/1/92	APPLICATION H SERIES		
			CHECKED DCV		DATE 3/2/92	DWG. NO. 107312		
			RELEASED DCW		DATE 3/2/92	C		