
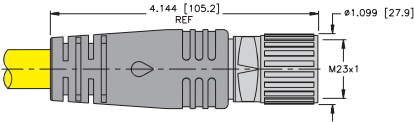

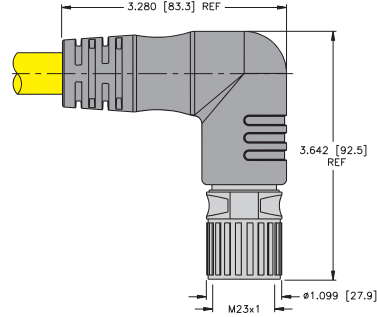
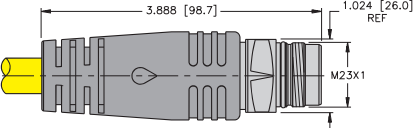

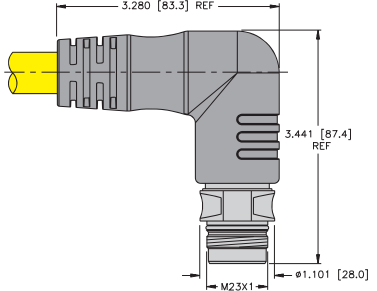



6 and 8-Wire M23 powerfast™ Cordsets, Shielded, 3-Key

- Female & Male Connectors
- Straight and Right Angles
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Features	Pinout
CKMS.. 	CKMS 622-286-*	AWM TC-ER PVC Yellow 6x12 AWG 90°C 15.5 mm OD 600 V, 30 A Cable #RF51286-*M†	High Current, 3-Key, Shielded	
CKWMS.. 	CKWMS 622-286-*			
CSSMS.. 	CSSMS 622-286-*			
CSSWMS.. 	CSSWMS 622-286-*			
	CKMS 822-288-*	AWM TC-ER PVC Yellow 4x12, 4x18 AWG 90°C 14.7 mm OD 600 V, 30 A (1-4) 300 V, 9 A (A-D) Cable #RF51288-*M†	High Current, 3-Key, Shielded	
	CKWMS 822-288-*			
	CSSMS 822-288-*			
	CSSWMS 822-288-*			

Cordsets

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.
Standard coupling nut material is nickel plated brass.

† See Section N for **reelfast**® cable information.