

TURCK Valve Connector Products


Valve Connectors, Type "I" (11 mm) Extensions

- **eurofast® and picofast® Connectors**
- **Wired for Use with Junction Box**
- **2 Conductors + Ground**



NRTL/C


**All parts except "E".




eurofast Extension

"I" Style Valve Connectors, eurofast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**	Indicator LED and Diode - DC only
Standard duty PVC	3/18 AWG Grey PVC 105°C 6.2 mm OD	0-220 24-48 110-220	VIS 2-A653-*M-RS 5.3T - - - - - - - -	- - - - VIS 2-B653-*M-RS 5.3T VIS 2-C653-*M-RS 5.3T	- - - - VIS 2-D653-*M-RS 5.3T VIS 2-E653-*M-RS 5.3T	- - - - VIS 2-F653-*M-RS 5.3T - - - -
Standard duty TPU	3/18 AWG Grey TPU 80°C 6.0 mm OD	0-220 24-48 110-220	VIS 2-A669-*M-RS 5.3T - - - - - - - -	- - - - VIS 2-B669-*M-RS 5.3T VIS 2-C669-*M-RS 5.3T	- - - - VIS 2-D669-*M-RS 5.3T VIS 2-E669-*M-RS 5.3T	- - - - VIS 2-F669-*M-RS 5.3T - - - -
Rubber	3/18 AWG Yellow CPE SJOOW, 105°C 8.0 mm OD	0-220 24-48 110-220	VIS 2-A654-*M-RSE 5.3T - - - - - - - -	- - - - VIS 2-B654-*M-RSE 5.3T VIS 2-C654-*M-RSE 5.3T	- - - - VIS 2-D654-*M-RSE 5.3T VIS 2-E654-*M-RSE 5.3T	- - - - VIS 2-F654-*M-RSE 5.3T - - - -



picofast Snap Extension




picofast Threaded Extension

"I" Style Valve Connectors, picofast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV	Indicator LED and Diode - DC only
Small diameter, PVC Snap lock	3/24 AWG Yellow PVC 105°C 4.4 mm OD	0-125 24-48 110-220	VIS 2-A642-*M-PSG 3 - - - - - - - -	- - - - VIS 2-B642-*M-PSG 3 - - - -	- - - - VIS 2-D642-*M-PSG 3 - - - -	- - - - VIS 2-F642-*M-PSG 3 - - - -
Small diameter, TPU Snap lock	3/24 AWG Black TPU 80°C 4.2 mm OD	0-125 24-48 110-220	VIS 2-A587-*M-PSG 3 - - - - - - - -	- - - - VIS 2-B587-*M-PSG 3 - - - -	- - - - VIS 2-D587-*M-PSG 3 - - - -	- - - - VIS 2-F587-*M-PSG 3 - - - -
Small diameter, PVC Threaded	3/24 AWG Yellow PVC 105°C 4.4 mm OD	0-125 24-48 110-220	VIS 2-A642-*M-PSG 3M - - - - - - - -	- - - - VIS 2-B642-*M-PSG 3M - - - -	- - - - VIS 2-D642-*M-PSG 3M - - - -	- - - - VIS 2-F642-*M-PSG 3M - - - -
Small diameter, TPU Threaded	3/24 AWG Black TPU 80°C 4.2 mm OD	0-125 24-48 110-220	VIS 2-A587-*M-PSG 3M - - - - - - - -	- - - - VIS 2-B587-*M-PSG 3M - - - -	- - - - VIS 2-D587-*M-PSG 3M - - - -	- - - - VIS 2-F587-*M-PSG 3M - - - -

* Length in meters


Type "I" (11 mm) Valve Connector to *eurofast* Extension

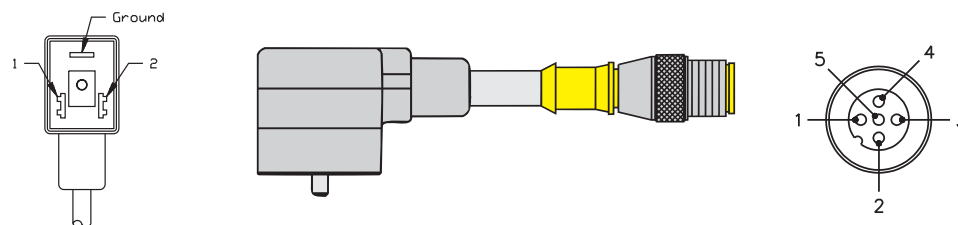

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)	Indicator LED and Diode - DC (F)
1 → 4 2 → 3 GND → 5			DC ONLY

Type "I" (11 mm) Valve Connector to *picofast* Extension

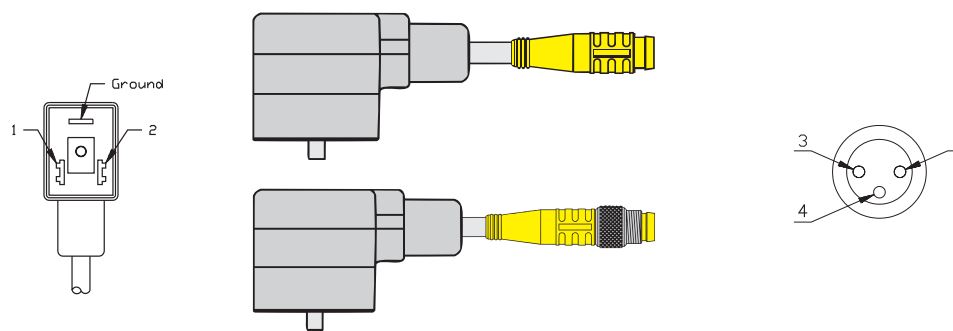

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)	Indicator LED and Diode - DC (F)
1 → 4 2 → 3 GND → NC			DC ONLY