


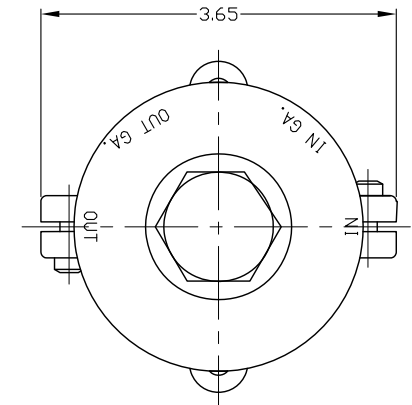

SPRING, LOADED, HAND OPERATED, PRESSURE REDUCING
REGULATOR WITH INTEGRAL SELF RELIEVING VENT VALVE.

2500 PSI OUTLET OPTION
O-RINGS: URETHANE


WEIGHT: APPROXIMATELY 6.25 LBS.

MAIN VALVE SEAT: CTFE
VENT VALVE SEAT: NONE
BACK CAP: 300 SERIES SST
BODY: SEE TABLE I
BACK-UP RINGS: TEFLON
O-RINGS: URETHANE
GASKETS: CTFE
REMAINING PARTS: TYPE 17-4, 300 SERIES SST
17-7, TEFLON & BRASS

FOR ASSEMBLY OF THIS UNIT USE SPEC: A60030-03

TABLE III	DASH NO.	PORT TYPE
	1	SAE (1/2 ONLY)
	2	NPT
	3	MS33649

TABLE IV	DASH NO./LTR	INLET & OUTLET PORT SIZE
	06	3/8
	08	1/2
	12	3/4

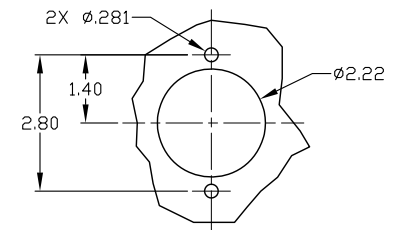

PANEL CUT-OUT

TESCO~~M~~M CORPORATION

INDUSTRIAL CONTROLS DIVISION
ELK RIVER, MN USA

INFORMATION CONTAINED ON THIS DOCUMENT IS THE PROPERTY OF TESCOM CORPORATION. NO RIGHTS ARE CONVEYED NOR IS PERMISSION TO DISCLOSE TO OTHERS GIVEN.

UNLESS OTHERWISE SPECIFIED:

Ø .0 ± .020 ANGLES: ±1°
 .000 ± .010
 .000 ± .005

SURFACE ROUGHNESS: 100/
 CORNER & FILLET RADI: .005-.020

THREADS: CLASS 2

REMOVE ALL BURRS

MFG. SPEC. 60301

DRAWING MADE IN THIRD ANGLE PROJECTION
(DO NOT SCALE DRAWING)

MATERIAL:

X

FINISH:

X

DRAWN BY:	CHECKED BY:	APPROVED BY:
RAG 3-26-12	TWL 4-12-12	TWL 4-12-12

INSTALLATION INFO.

SCALE: 1:1	SIZE C	NUMBER
CODE NO. 13669		44-13XX-XXXX-441
		SHT 1 OF 1

REV.	DATE	ECO NO.	BY: APPR
A	3-26-12	1644-12	RAG TWL
REFERENCES			
REFERENCE DRAWING(S)			