


THERMOCOUPLE TEMPERATURE SWITCH

Heating and Cooling Control, 16 Amp Rating, Two Alarms

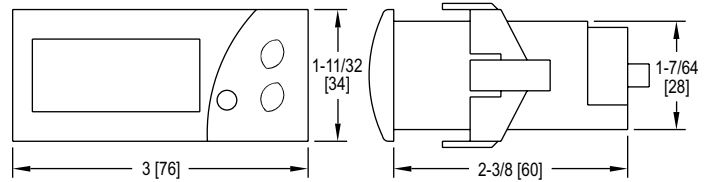

Panel cutout 2-51/64" x 1-9/64" (71 mm x 29 mm)

The **Series TCS Thermocouple Temperature Switch** monitors and controls temperature while offering a wide temperature range, two selectable alarm sets, and an internal buzzer indicating alarm condition or error.

BENEFITS/FEATURES

- Heating or cooling modes
- Internal alarm buzzer
- Configuration key to quickly load parameters from one unit to another

APPLICATIONS

- Food service equipment
- Industrial process control

| MODEL CHART | | |
|-------------|--------------|------|
| Model | Supply Power | Unit |
| TCS-4010 | 115 VAC | °F |
| TCS-4011 | 115 VAC | °C |
| TCS-4020 | 230 VAC | °F |
| TCS-4021 | 230 VAC | °C |
| TCS-4030 | 12 VAC/VDC | °F |
| TCS-4031 | 12 VAC/VDC | °C |
| TCS-4040 | 24 VAC/VDC | °F |

| ACCESSORIES |
|-----------------------------|
| See page reference 1 below. |

SPECIFICATIONS

Probe Range: 32 to 999°F (0 to 700°C) for Type J thermocouple; 32 to 999°F (0 to 999°C) for Type K thermocouple.
Input: Type J or K thermocouple.
Output: SPDT relay rated 16 A @ 240 VAC resistive.
Horsepower Rating (HP): 1 HP.
Control Type: ON/OFF.
Power Requirements: 115 VAC, 230 VAC, 12 VAC/VDC or 24 VAC/VDC (depending on model).
Accuracy: ±1% FS.
Display: 3-digit, red, 1/2" (12.7 mm) digits, plus sign.
Resolution: 1°.
Memory Backup: Nonvolatile memory.
Temperature Limits: Ambient: 32 to 158°F (0 to 70°C); Storage: -4 to 176°F (-20 to 80°C).
Weight: 2.3 oz (65 g).
Front Panel Rating: IP64.
Compliance: CE, cURus.