

TURCK Valve Connector Products


Valve Connectors, Type "I" (11 mm) Extensions

- **minifast[®] and microfast[®] Connectors**
- **Available with PVC, TPU and Rubber Jacket**
- **18 AWG**
- **2 Conductors + Ground (eurofast)**



NRTL/C


**All parts except "E".

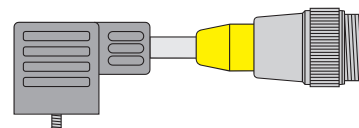

"I" Style Valve Connectors, minifast Extension

minifast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**
Standard duty PVC	3/18 AWG, Grey PVC 105°C 6.2 mm OD Black Body	0-220 24-48 110-220	VIS 2-A653-*M-RSM 30 - - - - - - - -	- - - - VIS 2-B653-*M-RSM 30 VIS 2-C653-*M-RSM 30	- - - - VIS 2-D653-*M-RSM 30 VIS 2-E653-*M-RSM 30
Standard duty TPU	3/18 AWG, Grey TPU 80°C 6.0 mm OD Black Body	0-220 24-48 110-220	VIS 2-A669-*M-RSM 30 - - - - - - - -	- - - - VIS 2-B669-*M-RSM 30 VIS 2-C669-*M-RSM 30	- - - - VIS 2-D669-*M-RSM 30 VIS 2-E669-*M-RSM 30
Rubber	3/18 AWG, Yellow CPE SJOOW, 105°C 8.0 mm OD Yellow Body	0-220 24-48 110-220	VIY 2-A658-*M-RSM 30 - - - - - - - -	- - - - VIY 2-B658-*M-RSM 30 VIY 2-C658-*M-RSM 30	- - - - VIY 2-D658-*M-RSM 30 VIY 2-E658-*M-RSM 30




"I" Style Valve Connectors, microfast Extension

microfast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**
Standard duty PVC	3/18 AWG, Grey PVC 105°C 6.2 mm OD Black Body	0-220 24-48 110-220	VIS 2-A653-*M-SB 3T - - - - - - - -	- - - - VIS 2-B653-*M-SB 3T VIS 2-C653-*M-SB 3T	- - - - VIS 2-D653-*M-SB 3T VIS 2-E653-*M-SB 3T
Standard duty TPU	3/18 AWG, Grey TPU 80°C 6.0 mm OD Black Body	0-220 24-48 110-220	VIS 2-A669-*M-SB 3T - - - - - - - -	- - - - VIS 2-B669-*M-SB 3T VIS 2-C669-*M-SB 3T	- - - - VIS 2-D669-*M-SB 3T VIS 2-E669-*M-SB 3T
Rubber	3/18 AWG, Yellow CPE SJOOW, 105°C 8.0 mm OD Yellow Body	0-220 24-48 110-220	VIY 2-A658-*M-SBE 3T - - - - - - - -	- - - - VIY 2-B658-*M-SBE 3T VIY 2-C658-*M-SBE 3T	- - - - VIY 2-D658-*M-SBE 3T VIY 2-E658-*M-SBE 3T

* Length in meters


Type "I" (11 mm) Valve Connector to *minifast* Extension

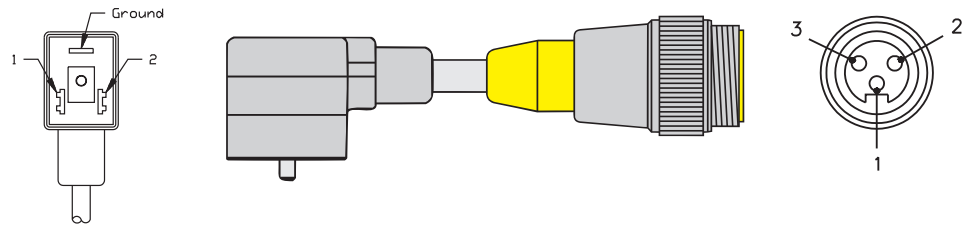

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)

Type "I" (11 mm) Valve Connector to *microfast* Extension

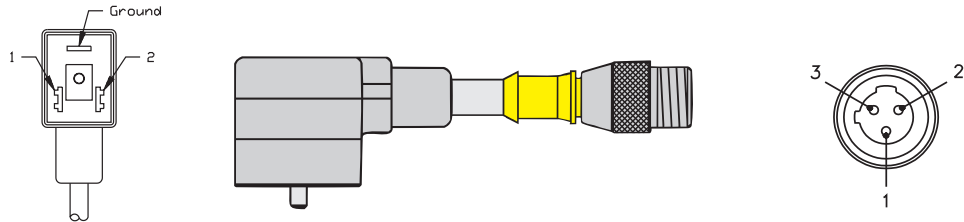

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)