




19-Pin Cordsets, DC Color Code, Standard Wiring

- For *euromast*® Junction Boxes and multi-conductor Applications
- IEC IP67 Protection
- 150 V, 9 A (18 AWG) & 2 A (22 AWG)

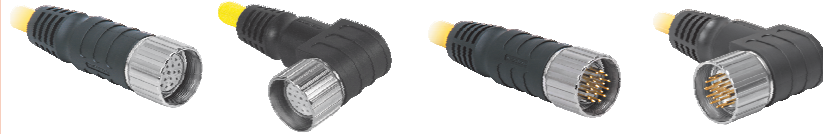

Connector Style	Female Part Number	Male Part Number	Features	Pinout
CKM .. 	CKM 19-11-*	CSM 19-11-*	PLTC PVC Yellow, 3x18, 8x22 AWG, 105°C, 8.5 mm OD, Cable #RF50624-*M† 4-port, 2 signals per port <i>flexlife</i> ®	Female
	CKWM 19-11-*	CSWM 19-11-*		
CKWM .. 	CKM 19-11-*/S90	CSM 19-11-*/S90	TPU Yellow, 3x18, 8x22 AWG, 90°C, 8.4 mm OD, Cable #RF50718-*M†, 4-port, 2 signals per port Cut/Abrasion Immune	Female
	CKWM 19-11-*/S90	CSWM 19-11-*/S90		
CSM .. 	CKM 19-15-*	CSM 19-15-*	PVC Yellow, 3x18, 12x22 AWG, 105°C, 8.4 mm OD, Cable #RF50625-*M†, 6-port, 2 signals per port <i>flexlife</i>	Female
	CKWM 19-15-*	CSWM 19-15-*		
CSWM .. 	CKM 19-15-*/S90	CSM 19-15-*/S90	TPU Yellow, 3x18, 12x22 AWG, 90°C, 8.5 mm OD, Cable #RF50818-*M†, 6-port, 2 signals per port Cut/Abrasion Immune	Male
	CKWM 19-15-*/S90	CSWM 19-15-*/S90		
CSWM .. 	CKM 19-19-*	CSM 19-19-*	PLTC PVC Yellow, 3x18, 16x22 AWG, 105°C, 10.0 mm OD, Cable #RF50620-*M†, 8 port, 2 signals per port <i>flexlife</i>	Male
	CKWM 19-19-*	CSWM 19-19-*		
CSWM .. 	CKM 19-19-*/S90	CSM 19-19-*/S90	AWM TPU Yellow, 3x18, 16x22 AWG, 90°C, 10.0 mm OD, Cable #RF50682-*M†, 8 port, 2 signals per port Cut/Abrasion Immune	Male
	CKWM 19-19-*/S90	CSWM 19-19-*/S90		
CSWM .. 	CKM 19-19-*/S101	CSM 19-19-*/S101	PLTC TPE Yellow, 3x18, 16x22 AWG, 105°C, 9.3 mm OD, Cable #RF50916-*M†, 8 port, 2 signals per port <i>flexlife</i> -20, High Flex - Over 20 million cycles	Male
	CKWM 19-19-*/S101	CSWM 19-19-*/S101		

* Length in meters.

Standard cable lengths are 5 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass.. "CKM.."; "CKMV.." indicates stainless steel coupling nut.

† See Section N for *reelfast*® cable information.