

Bimetal Thermometer



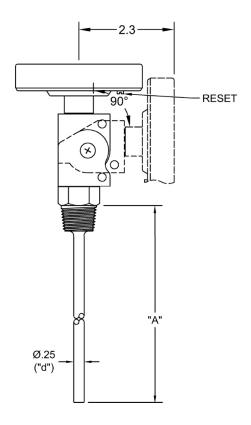

| Part #: | |
|------------------------|------------------------------------|
| | LL0601F03 |
| | |
| Description: | |
| Industrial Bimetal Dia | I Thermometer, 3" Dial, Adjustable |

Angle/Reset, 6" Stem, 1/2" NPT (fits std. thermowell), -100/100°F

| Thermometer Data: | | | | |
|---------------------------|---------------------------------|--|--|--|
| Dial Size/ Configuration: | 3" Dial, Adjustable Angle/Reset | | | |
| Stem Length, "A": | 6 in. (152mm) | | | |
| Stem Dia., "d": | 1/4" | | | |
| Process Connection: | 1/2" NPT (fits std. thermowell) | | | |
| Temperature Range: | -100/100°F | | | |
| Accuracy: | +/- 1% of full scale | | | |
| Actuation: | Bimetal coil in stem | | | |
| Sealing: | Hermetically Sealed per ASME | | | |
| | B40.3 | | | |

| Revisions*: | Data ger | nerated on: | 4/22/2020 | | |
|--------------|-----------------|-------------|-----------|--|--|
| Latest Rev: | x1 | Rev. Date: | 11/1/2012 | | |
| Description: | Initial Release | | | | |

*Revision date applies to all possible data: Individual drawings may not be affected. To obtain current revision, re-generate drawing at www.reotemp.com.

| | Part Name: LL0601F03 | | | | | | | |
|--------------|---|---|--------------------------------|-------|---------------|--|----------------------|--|
| | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: | | REOTEMP Instrument Corporation | | | | SEE_ABOVE | |
| | FRACTIONS DECIMALS ANGLES | d | REO | TEM | | 92121 USA | JR JR APPROVED | |
| File Control | XX ± .01 .XXX ± .005 | | INSTRUM | MENTS | | Phone: (858) 784-0710 Fax: (858) 784-0720 | | |
| BH-LL | Copyright © 2012 | | 2479 | | SFE A | 30\/F | | |
| BC-1J25 | REOTEMP Instruments | В | | | <u> </u> | | | |
| BS-25 | | | SCALE: NTS F | | FILE NAME: SH | | OF 1 | |