

Pressure

Electronic Dual Differential Pressure Switch

BDS3000

Features

- ▶ Measuring range: differential: 0 - 500 psid
- ▶ Enclosure Rating: Type 4X (IP65) / Type 6 (IP67)
- ▶ Two switch points
- ▶ 0.50% accuracy
- ▶ Analog output 4 - 20 mA or 0 - 10 V
- ▶ Superior EMI protection
- ▶ Display & electronic connection: rotatable by 320°
- ▶ Simple navigation menu
- ▶ IO-Link digital communication interface
- ▶ Hydraulic and pneumatic compatible

Applications

- ▶ Filtration
- ▶ Machine tool industry
- ▶ Factory Automation
- ▶ Lubrication monitoring
- ▶ Pumps and compressors




General Specifications

Sensor element:	Piezoresistive sensor	Analog output: Current output: Scanning rate: Voltage output: Rating: Adjustment range:	4-20 mA 2 ms 0 to 10 V DC max. 10 mA 25% to 100% f. s.			
Materials: Wetted parts:	Stainless steel fittings 316L Stainless steel sensors					
Enclosure:	304 Stainless steel, PBT	Transistor switching outputs:				
Seals:	FKM fluoroelastomer					
Operating elements:	3 easy-response push-buttons	Switching function:	Normally open / normally closed, standard / window mode and diagnosis function adjustable PNP / NPN (field selectable on IO-Link units)			
Enclosure rating:	Type 4X (IP65) / Type 6 (IP67)					
Protection class:	III	Switching output:	0% to 125% f. s.			
Electrical connection:	Plug M12 x 1, 5-pin					
Process connection:	1/4" NPT female (low and high sides)	Adjustment range for switching point and hysteresis:	Max. 100 Hz			
Dimensions:	3.00 x 1.60 x 4.81 inches					
Weight:	Approx. 1.5 lb	Switching frequency:	Max. 500 mA (250 mA IO-Link units), short- circuit-proof			
A/D-Converter: Resolution: Scanning rate:	12 bit (4,096 steps per measure span) 1000/s					
Linearity error:	< ±0.5 % f. s. at +25 °C	Load:	0.0 s to 50.0 s adjustable			
Temperature influence:	TC zero < ±0.2 % FSO / 10K TC span < ±0.3 % FSO / 10K					
Compensation range:	32°F to 122°F (0°C to +50°C)	Delay:	LED(s) red			
Repeatability:	±0.1% f. s.					
Temperature range: Media: Electronics: Storage:	-13°F to 212°F (-25°C to +100°C) 14°F to 158°F (-10°C to +70°C) -22°F to 176°F (-30°C to +80°C)	Status display(s):	Max. 100 Hz			
Power supply¹:	15 to 32 V DC, reversed polarity protected (SELV, PELV), Class 2					
Power consumption:	Approx. 50 mA (without load)	IO-Link Communication Interface				
Digital display: Display rate:	4-digit 14-segment LED red display, digit height .35 inches (9 mm) 20/s	Transmission type:	COM2 (38.4 kBaud)			
Error display:	LED RED and alphanumeric display					
		IO-Link revision:	1.1			
		SDCI standard:	IEC 61131-9			
		Profiles:	Smart Sensor, Process Data Variable, Device Identification, Device Diagnosis			
		SIO modules:	Yes			
		Required master port type:	A			
		SIO output:	1 analog / 2 binary (switch points) [see product configurator]			
		Min. process cycle time [ms]: Device ID:	2.5 0x071...			
Pressure Ranges						
Pressure Range Code	Differential Pressure	Proof Pressure	Proof Pressure	Common Pressure		
	P1>P2 (PSID)	P1>P2 (PSID)	P2>P1 (PSID)	P1=P2 (PSI)		
0015P	0-15	30	15	2500		

Electronic Dual Differential Pressure Switch

BDS3000

Technical Drawings

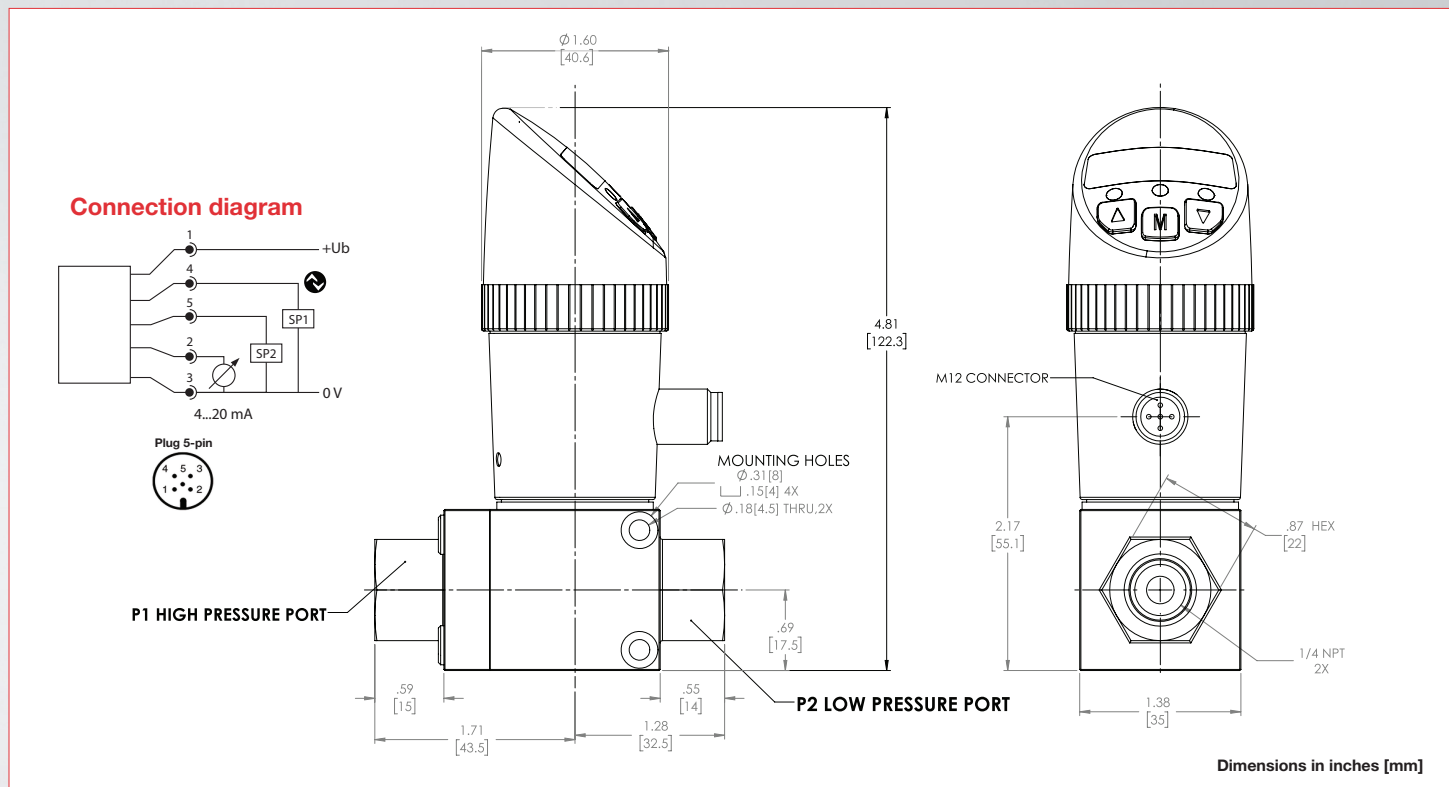

Product Configurator

Example	BDS3	4	F	V	M	0500P
---------	------	---	---	---	---	-------

Series:

BDS3	Series BDS3000, electronic dual differential pressure switch
------	--

Output:

4	Dual switch point plus 4-20mA (0-10V field selectable)
8	IO-Link / Dual switch point plus 4-20mA (0-10 field selectable)

Process Connections:

F	1/4" NPT female
---	-----------------

Electrical Connection:

M ¹	M12
----------------	-----

Sealing:

V	FKM fluoroelastomer
---	---------------------

Pressure Ranges²

0015P	0 - 15 psid (differential)
0100P	0 - 100 psid (differential)
0500P	0 - 500 psid (differential)

Accessories

Order Number	Description
239546-1M-R-S ³	5 Pin M12 Female Right Angle Plug Molded Cable, 3.28 Feet (1 Meter), Shielded
239546-1M-S ³	5 Pin M12, Female Straight Plug Molded Cable, 3.28 Feet (1 Meter), Shielded
239548-S	5 Pin M12 Female Straight Connector
239548-R	5 Pin M12 Female Right Angle Connector

Note:

1. Mating connector not included with unit; mating connectors are available and can be ordered as an accessory.
2. Contact factory for ranges not listed including BAR.
3. See Cable Connectors & Accessories for more options.