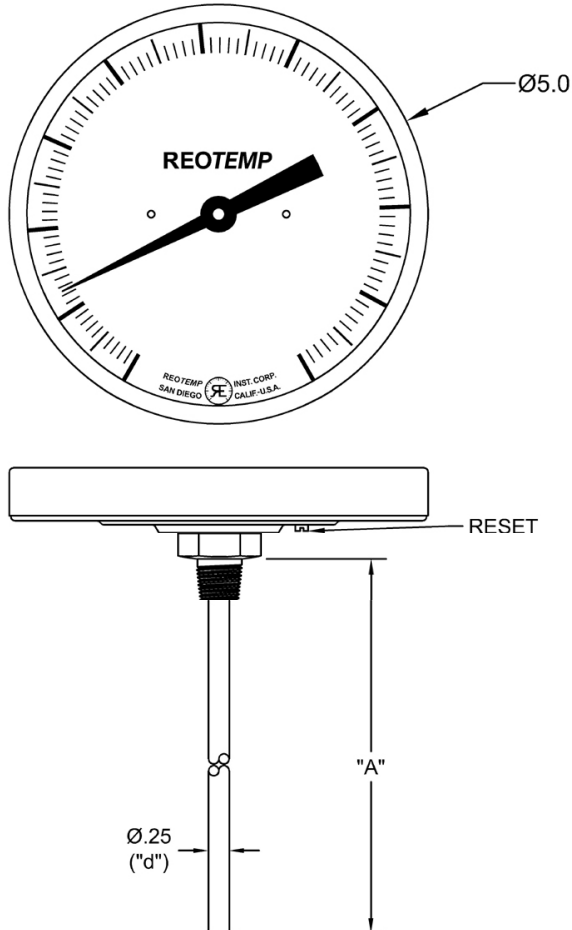


# Bimetal Thermometer

**Part #:**

BB0904F47-PYR3

**Description:**

Industrial Bimetal Dial Thermometer, 5" Dial Back Conn./Reset, 9" Stem, 1/4" NPT (1/4 dia. stem only), 0/250°F, Polycarbonate Window, 3 Point Calibration Cert

**Thermometer Data:**

Dial Size/ Configuration:	5" Dial Back Conn./Reset
Stem Length, "A" :	9 in. (229mm)
Stem Dia., "d" :	1/4"
Process Connection:	1/4" NPT (1/4 dia. stem only)
Temperature Range:	0/250°F
Accuracy:	+/- 1% of full scale
Actuation:	Bimetal coil in stem
Sealing:	Hermetically Sealed per ASME B40.3

**Options and Accessories:**

(may not be depicted in drawing)

Option 1:	Polycarbonate Window
Option 2:	3 Point Calibration Cert

Revisions*:	Data generated on:	2/1/2021
Latest Rev:	x1	Rev. Date: 11/1/2012
Description:	Initial Release	

\*Revision date applies to all possible data: Individual drawings may not be affected. To obtain current revision, re-generate drawing at [www.reotemp.com](http://www.reotemp.com).

Part Name: BB0904F47-PYR3

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± 1/32 .X ± .2 ± 5°  
.XX ± .01  
.XXX ± .005

REOTEMP Instrument Corporation  
10656 Roselle Street  
San Diego, CA 92121 USA  
Phone: (858) 784-0710  
Fax: (858) 784-0720

DATE  
SEE ABOVE  
DRAWN BY  
JR  
APPROVED

File Control

BH-BB  
BC-4A  
BS-25

Copyright © 2012  
REOTEMP Instruments

SIZE  
B 24793

SCALE: NTS

CAGE CODE: DWG NO.  
24793 SEE ABOVE

FILE NAME:

SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF REOTEMP INSTRUMENT CORP., AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS DEPICTED HEREIN WITHOUT WRITTEN PERMISSION FROM REOTEMP INSTRUMENT CORP.

NOTES (UNLESS OTHERWISE SPECIFIED):  
1. DIMENSIONS ARE IN INCHES