

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

800 psig / 55.2 bar

Controlled Pressure Ranges

40-150, 40-300, 100-700, 100-800 psig
2.8-10.3, 2.8-20.7, 6.9-48.3, 6.9-55.2 bar

Design Proof Pressure

150% maximum rated

Leakage

Bubble-tight

Operating Temperature

-15°F to 140°F / -26°C to 60°C

Flow Capacity

$C_v = 0.10$

MEDIA CONTACT MATERIALS

Body

316 Stainless Steel or Brass

Seat

PCTFE

O-Ring

FKM (Viton®-A)

Back-up Ring

PTFE

Remaining Parts

Stainless Model: 316 Stainless Steel

Brass Model: Brass and 300 Series Stainless Steel

OTHER

Cleaning

CGA 4.1 and ASTM G93

Weight

2 lbs / 0.9 kg

Teflon® and Viton® are registered trademarks of E.I. du Pont de Nemours and Company.



TESCOM 44-1700 Series is a general purpose, compact backpressure regulator for control pressures up to 800 psig / 55.2 bar.

Application


- Industrial equipment for hydraulic or pneumatic service

Features and Benefits

- Economical, compact design
- Piston sensed design is safe and reliable
- Available in a Stainless Steel or Brass design
- Optional gauge ports and panel mounting
- Flow capacity $C_v = 0.10$
- Low handknob torque for easy operation
- Bubble-tight shutoff at all reseating pressures


44-1700 SERIES

44-1700 Series Regulator Drawing

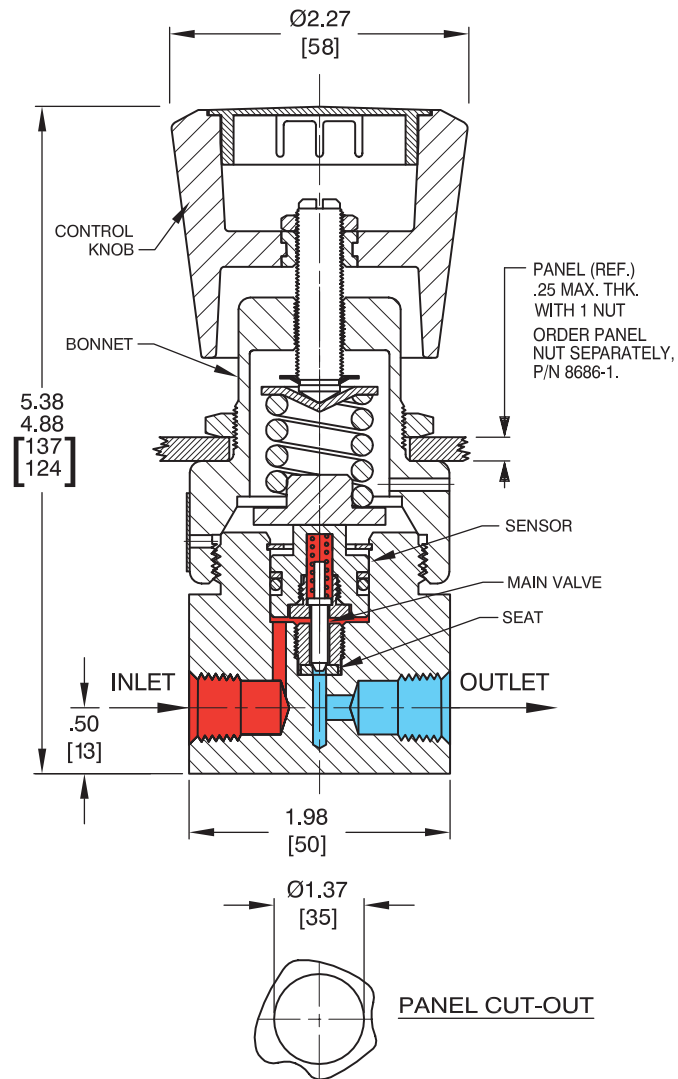

**44-1700 SERIES
BACKPRESSURE REGULATOR**


**BACKPRESSURE
CONTROL OF
STORAGE VESSEL**

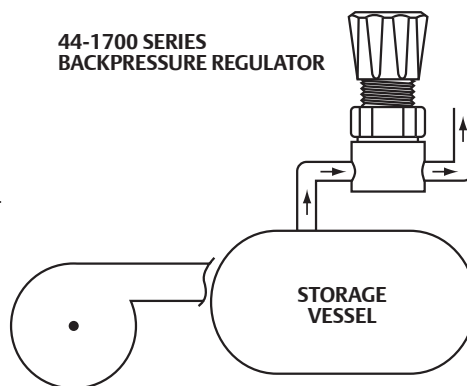

*All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets*

44-1700 Series Regulator Flow Chart

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCO catalog or on www.tescom.com.

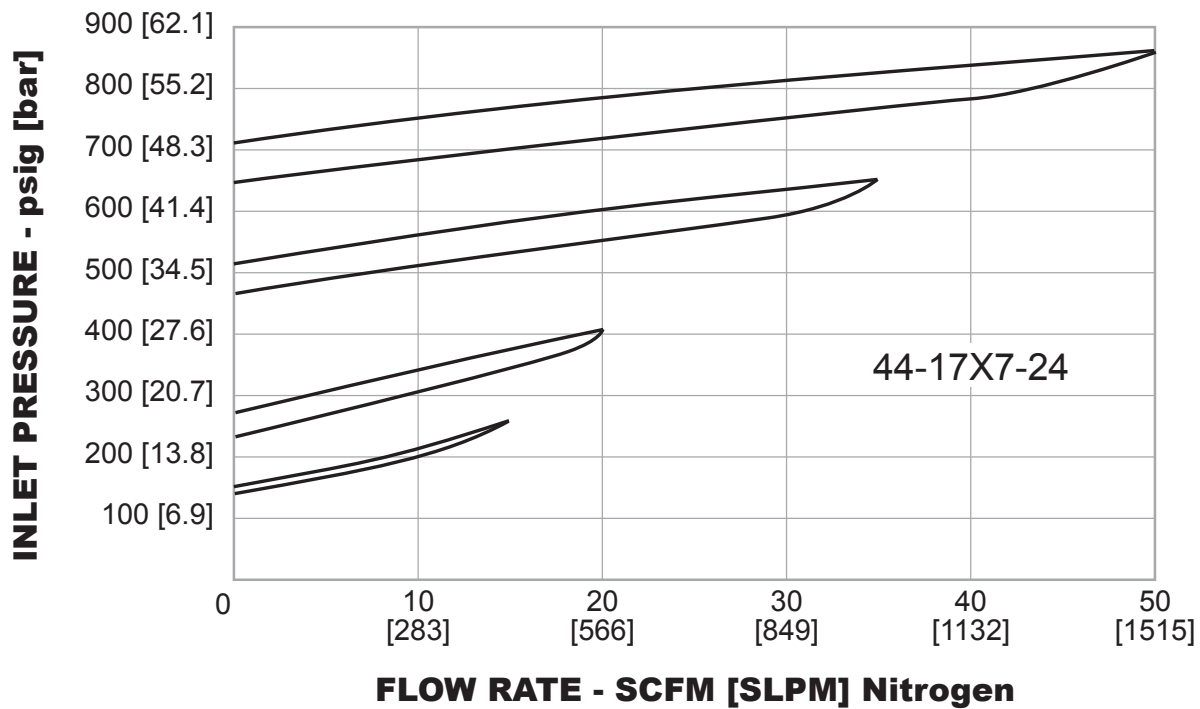

44-1700 SERIES

44-1700 Series Regulator Part Number Selector

 **Learn more about common options.**
For modifications, repair kits and accessories, contact factory.

Example for selecting a part number:

44-17	6	7	-	2	4
BASIC SERIES	BODY MATERIAL	INLET PRESSURE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	
44-17	1 – Brass 6 – 316 Stainless Steel	2 – 40-150 psig 2.8-10.3 bar 3 – 40-300 psig 2.8-20.7 bar 7 – 100-700 psig 6.9-48.3 bar 8 – 100-800 psig 6.9-55.2 bar	2 – NPTF	4 – 1/4"	