
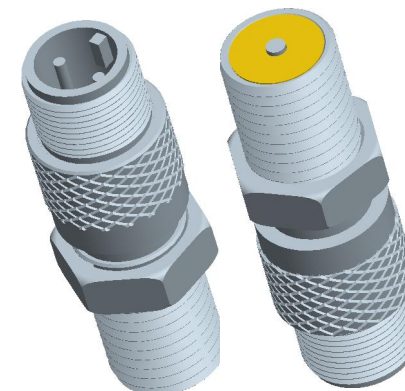



REV	ECN	DESCRIPTION	DATE	DR	CK
A	7866	REDRAW IN CAD	03/15/12	PF	MG

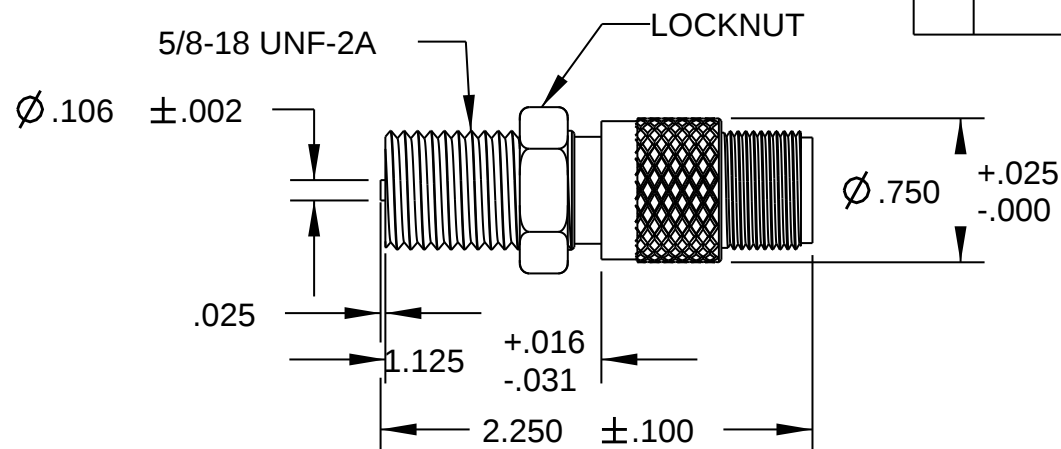

TEMPERATURE RANGE	OUTPUT VOLTAGE PEAK TO PEAK	DC RESISTANCE OHMS	INDUCTANCE MILLIHENRYS	OUTPUT CONNECTOR	INSULATION RESISTANCE	NET WEIGHT
-65 ° F to +225 ° F	160-240 VOLTS (SEE NOTE 1)	1000-1300 AT 75 ° F	360 NOM	MATES WITH MS3106A-10SL-4S (SEE NOTE 2)	100 MEGOHMS MIN. AT 500 VDC, COIL TO HOUSING	1.8 OZ. AVG.

NOTES:

- 1- TESTED AT 1000 INCHES/SECOND WITH A 20 PITCH, 30 TOOTH GEAR, 0.005" CLEARANCE AND 100,000 OHM LOAD.
- 2- WITH APPROACH OF FERROUS METAL, PIN "B" IS POSITIVE WITH RESPECT TO PIN "A".

CONSTRUCTION:

HOUSING ----- 303 STAINLESS STEEL
POLE PIECE --- 416 STAINLESS STEEL
POTTING ----- EPOXY RESIN

THIS DOCUMENT, ALL INFORMATION CONTAINED IN AND ALL INFORMATION RELATED TO THE PROPERTY OF DYNALCO CONTROLS, IS CONFIDENTIAL TO IT AND NO PART THEREOF NOR ANY SUBSTANTIAL INFORMATION MAY BE COPIED, DISSEMINATED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN CONSENT OF DYNALCO AND IS TO BE RETURNED TO DYNALCO UPON REQUEST.

TOLERANCES	FRACT.	DEC.	ANGLES
±1/64	.XXX	±.005	±1/2°
	.XX	±.01	
MATERIAL			
FINISH			

		THIRD ANGLE PROJECTION		Sheet1 of 1	
DYNALCO					
MODEL M102			DRAWN PF	SCALE	
PATH MPROD\PICKUPS\M102			APPROVED JR	NONE	
TITLE MAGNETIC PICKUP, MODEL M102					
DATE 09/18/09		A 800-0102			REV A