

SERIES AR62/AR63 HENGSTLER

Magnetic Absolute Encoder

Key Features

- 12 Bit Single-Turn Resolution, up to 16 Bit Multi-Turn
- Oversized Bearings for up to 3x Life of Standard Absolute Encoders
- Wide -40° to 100°C Temperature Range
- Submersible — IP69K Sealing Available
- Rated to 200g Shock, 20g Vibration for Harsh Environments
- Stainless Steel or Aluminum Housing

HD
Heavy Duty



SPECIFICATIONS

STANDARD OPERATING CHARACTERISTICS:

Code: Absolute, Magnetic
Absolute Accuracy: $\pm 1^{\circ}$
Repeatability: $\pm 0.2^{\circ}$

ELECTRICAL:

Noise Immunity: Tested to EN61326-1
Parametrization: Preset
Termination: Cable radial, PVC; M12 connector, radial; Cable radial for maritime approval

Interface: CANopen & SSI
Input Power: 10-30VDC (+10%)
Resolution: Single-turn: 12 Bit
Resolution: Multi-turn: 12, 16 Bit

Interface: Analog
Input Power: 17-30VDC (+10%)
Resolution Analog:
 AV: 0...10V (Voltage)
 A4: 4...20mA (Current)
Measuring Range in Degrees: 90° , 180° , 360° , others on request
Measuring Range in Resolutions: 4, 8, 16 revolutions, others on request
Control Inputs: Preset, Direction

MECHANICAL:

Shaft Diameter: $3/8''$, 10 mm
Shaft Speed (maximum): 5000 rpm
Shaft Load (axial/radial): 300 N max.
Mounting Depth: 32 mm
Maximum Speed: max. 5,000 rpm;
Maximum Speed Analog: max. 1,500 rpm (continuous), Max 5,000 rpm (short term)
Starting Torque typ.: ≤ 4.5 Nm

MECHANICAL (Cont.):

Moment of inertia: 25 gcm²
Housing Material: Stainless Steel
Shaft Material: Stainless Steel
Weight:
 AR62 w/ 1.5m cable: approx. 480g
 AR62 w/ connector M12: approx. 250g
 AR63 w/ 1.5m cable: approx. 700g
 AR63 w/ connector M12: approx. 470g

ENVIRONMENTAL:

Standard Operating Temperature:
 SSI: -40°C ... $+100^{\circ}\text{C}$
With Maritime Approval (DNV GL): -40°C ... $+85^{\circ}\text{C}$
 Canopen, Analog: -40°C ... $+85^{\circ}\text{C}$
Storage Temperature: -15°C ... $+85^{\circ}\text{C}$
Shock: 2000 m/s² (6 ms)
Vibration: 200 m/s² (10 ... 2000 Hz)

Humidity: 75%, without condensation
Enclosure Rating: IP67 or IP69K

ELECTRICAL CONNECTIONS – SSI

Cable Color	PIN	Signal
Yellow	6	Clock
Pink	5	Data
Green	4	Clock
Grey	8	Data
Blue	7	Signal Direction ¹
White	1	UB
Brown	2	0V
Red	3	Preset (set to 0) ¹
Screen	Screen	Screen

Note:

¹ Preset and Direction high active :
 Signal level high: $\geq 66\%$ Ub; low: $\leq 15\%$ Ub or unconnected
 Bounce time preset: $>2\text{s}$
 Bounce time direction: < 1 ms (dynamic)

ELECTRICAL CONNECTIONS – CANopen

Color Cable	Signal	M12, 5 Pole	M12, 8 Pole
Yellow	CAN in+	4	6
Green	CAN in-	5	4
Pink	CAN out+	-	5
Grey	CAN out-	-	8
Blue	CAN GND in	1	7
Black*	CAN GND out	-	3
White	UB	2	1
Brown	0 V	3	2
Screen	Screen	Screen	Screen

* Cable color is Red for extension cable

ELECTRICAL CONNECTIONS – Analog

Cable Color	PIN	Signal
Pink	5	0 ... 10 V (Voltage), or 4 ... 20 mA (Current)
Blue ²	7	Direction (change value counting)
Grey	8	AGND (Analog ground)
Red ²	3	Preset (set to 0)
White	1	UB
Brown	2	0 V (connected with AGND)
Yellow ¹	6	Diagnostic 1
Green ¹	4	Diagnostic 2
Screen	Screen	Screen

¹ Diagnostic signals only for service purposes. The cable wires have to be isolated.

² Preset and Direction low active: Signal level high \leq DC 2 V

HENGSTLER SERIES AR62/AR63

Ordering Information

To order, complete the model number with code numbers from the table below:

SSI, CANopen

Code 1: Model	Code 2: Resolution ¹	Code 3: Output	Code 4: Flange ² /Protection/Shaft	Code 5: Interface ^{3,4}	Code 6: Termination ^{5,6,7,8}	Code 7: Cable Length
AR62/63	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ordering Information						
AR62 Aluminum AR63 Stainless Steel	0012 12 Bit ST 1212 12 Bit MT + 12 Bit ST 1312 13 Bit MT + 12 Bit ST 1612 16 Bit MT + 12 Bit ST	E DC 10-30 V	L.72 Synchro-Clamping, IP67 10 mm L.92 Synchro-Clamping, IP69K, 10 mm Q.76 Square flange, IP67, 9.52 mm Q.96 Square flange, IP69K, 9.52 mm	OL CAN Open ⁹ SB SSI-Binary SG SSI-Gray	B Radial Cable F Radial Cable for Maritime (DNV GL) 8 M12 radial connector, 8-pin 5 M12 radial connector, 5-pin	Available only when Code 6 is B or F Blank 1.5m DO 3m FO 5m KO 10m PO 15m UO 20m VO 25m WO 30m XO 40m YO 50m

¹ Other resolution on request

² Square flange with stainless housing (AR63) on request

³ Standard setting CANopen: Bus termination not activated. External bus terminal resistor required.

⁴ E1 approval only with interface "OL" CANopen available.

⁵ M12 Connector not available in stainless steel. IP67 and IP69k only guaranteed if mating plug connected correctly.

⁶ DNV GL approval only with connection "5", "8" or "F" available.

⁷ Maximum operating temperature with connection "F": -40°C ... +85°C.

⁸ Connection "5" M12-connector 5-pole only available with interface "OL" CANopen.

⁹ E1 approval (only available with interface "OL" CANopen)

ANALOG

Code 1: Model	Code 2: Resolution ^{1,2}	Code 3: Output	Code 4: Flange ³ /Protection/Shaft	Code 5: Interface ^{3,4}	Code 6: Termination ^{4,5}	Code 7: Cable Length
AR62/63	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ordering Information						
AR62 Aluminum AR63 Stainless Steel	Measuring range in degrees: G090 90° G180 180° G360 360° Other on request Measuring range in revolutions: U004 4 revolutions U008 8 revolutions U016 16 revolutions Other on request	F DC 17-30 V	L.72 Synchro-Clamping, IP67 10 mm L.92 Synchro-Clamping, IP69K, 10 mm Q.76 Square flange, IP67, 9.52 mm Q.96 Square flange, IP69K, 9.52 mm	AV Analog 0 ... 10V A4 Analog 4 ... 20mA	B Radial Cable F Radial Cable for Maritime (DNV GL) 8 M12 radial connector, 8-pin	Available only when Code 6 is B or F Blank 1.5m DO 3m FO 5m KO 10m PO 15m UO 20m VO 25m WO 30m XO 40m YO 50m

¹ Coding of the measuring range in degree or revolutions.

² Measuring Range G360 = 360° similar to former definition 0012 = 12 Bit ST.

³ Square flange with stainless housing (AR63) on request.

⁴ M12 Connector not available in stainless steel. IP67 and IP69k only guaranteed if mating plug connected correctly.


⁵ DNV GL approval only with connection "5", "8" or "F" available.

⁶ Maximum operating temperature with connection "F": -40°C ... +85°C.


HENGSTLER SERIES AR62/AR63

DIMENSIONS inch
[mm]

Synchro Clamping

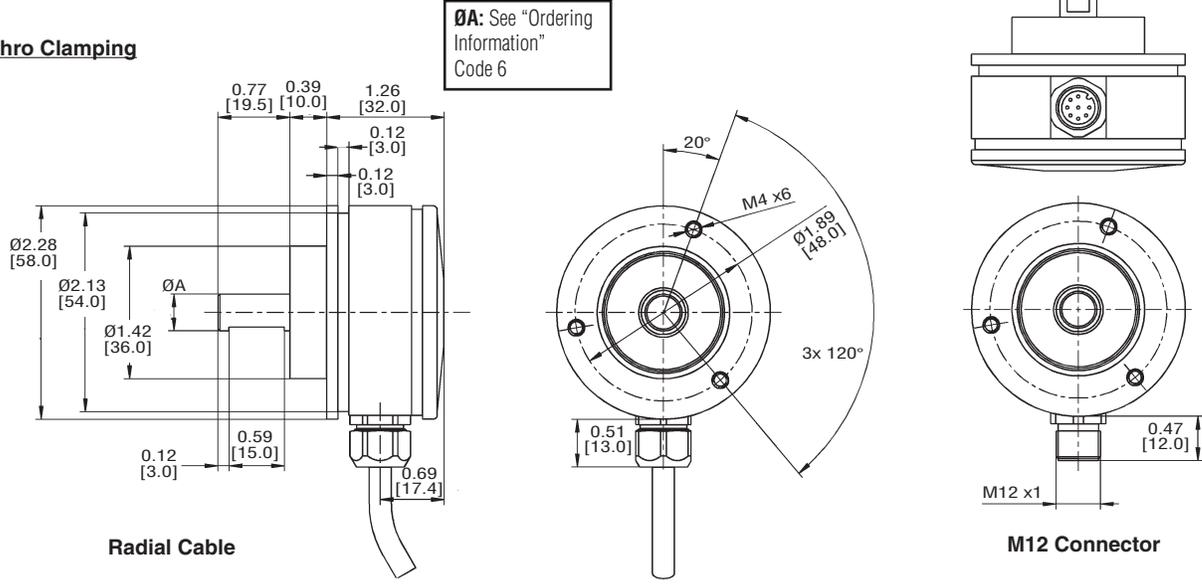

Square Flange

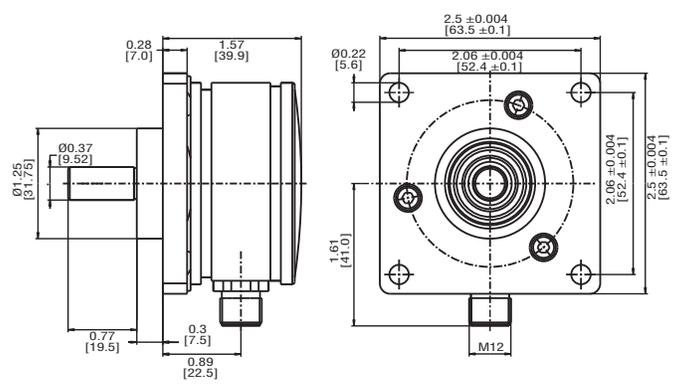

Worldwide Brands: NorthStar™ • Dynapar™ • Hengstler™ • Harowe™

DYNAPAR
INNOVATION - CUSTOMIZATION - DELIVERY

WWW.DYNAPAR.COM

Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA

Customer Service:
Tel.: +1.800.873.8731
Fax: +1.847.662.4150
custserv@dynapar.com

Technical Support
Tel.: +1.800.234.8731
Fax: +1.847.662.4150
dynapar.techsupport@dynapar.com

European Sales Representative
Hengstler GmbH
Uhlandstrasse 49, 78554 Aldingen
Germany
www.hengstler.com

Hengstler Brand is a trademark of Hengstler GmbH. All rights reserved.
Specifications subject to change without notice.
702910-0002 Rev. H ©2018 DYNAPAR